

Legend G3.5





G3.5 700X fireplace with Pebble Beach Driftwood fuel bed 700XDWK, Fluted Black liner 707FBL, and Edgemont front in Hammered Vintage Iron 716EHV with a 3-sided Black trim 717BPB.

Valor The Legend Continues

With over two decades of design innovation and four generations of Legend gas insert DNA, now more than ever the Legend G3.5 exudes radiance, high efficiency and the ultimate in comfort control.

DESIGN

A collection of contemporary trims frame an impressive viewing area, highlighting warm, glowing flames within. Fireplace surrounds include both three and four-sided designs, providing flexible installation options and visual updates to your existing hearth.

As well, Valor's Edgemont fronts now include a new Hammered look in Vintage Iron, Oiled Bronze and Copper finishes. Each is finely crafted with 11 gauge corner gussets, solid steel rivet heads, rich powder coat paint and hand finished antique copper.

PERFORMANCE

Simply updating fireplace aesthetics is not enough: Valor upgrades the overall performance of your gas insert with several features. Increased radiant heat output, advanced controllability and natural convection are just a few reasons why Valor leads the industry in gas insert excellence.

TECHNOLOGY

Another industry first, Valor Dynamic Restrictor Technology (VDRT) automatically adjusts air flow within the fireplace, increasing thermal efficiencies. VDRT maximizes initial startup and improves overall performance in ways fixed restrictors cannot.

A contemporary update for existing spaces, the Legend G3.5 is a welcome addition to the highly successful Legend Insert family.

G3.5 700I fireplace with Logs fuel bed 702LSK, Valor Red Brick liner 708VRL, and Edgemont Brushed Nickel front 721EDN with a 3-sided Black trim 717BPB.



Surround Finish Options

EDGEMONT FRONTS



701RSK	Rocks				
706RGL	Reflective Glass liner				
721EDV 717BPB	Vintage Iron front and 3-sided Black trim				
111010	J Slaca Dlack tilli				

EDGEMONT HAMMERED FRONTS



700XDGS	Decorative Glass					
706RGL	Reflective Glass liner					
716EHV 717BPB	Hammered Vintage Iron front 3-sided Black trim					

FLOATING FRONTS



702LSK	Logs					
708VRL	Valor Red Brick liner					
713FFV	4-sided Vintage Iron front					



702LSK	Logs
707FBL	Fluted Black liner
721EDN	Brushed Nickel front and
717BPB	3-sided Black trim



701RSK	Rocks
707FBL	Fluted Black liner
721EDZ 717BPB	Bronze front and 3-sided Black trim



700XDWK	Pebble Beach Driftwood					
707FBL	Fluted Black liner					
716EHC 719BPB	Hammered Copper front and 4-sided Black trim					
11/010	- SIGCO DIGCK LITTI					



700XDGM	Murano Glass				
706RGL	Reflective Glass liner				
716EHOZ 717BPB	Hammered Oiled Bronze front 3-sided Black trim				




702LSK	Logs
707FBL	Fluted Black liner
709FTP	3-sided Brushed Nickel front
714BPB	3-sided Black back



702LSK	Logs				
705LSL	Ledgestone liner				
709FTZ	3-sided Bronze front				

G3.5 700I fireplace with Log fuel bed 702LSK, Valor Red Brick liner 708VRL, floating front in Vintage Iron 709FTV, and Black backing plate 710BPB.

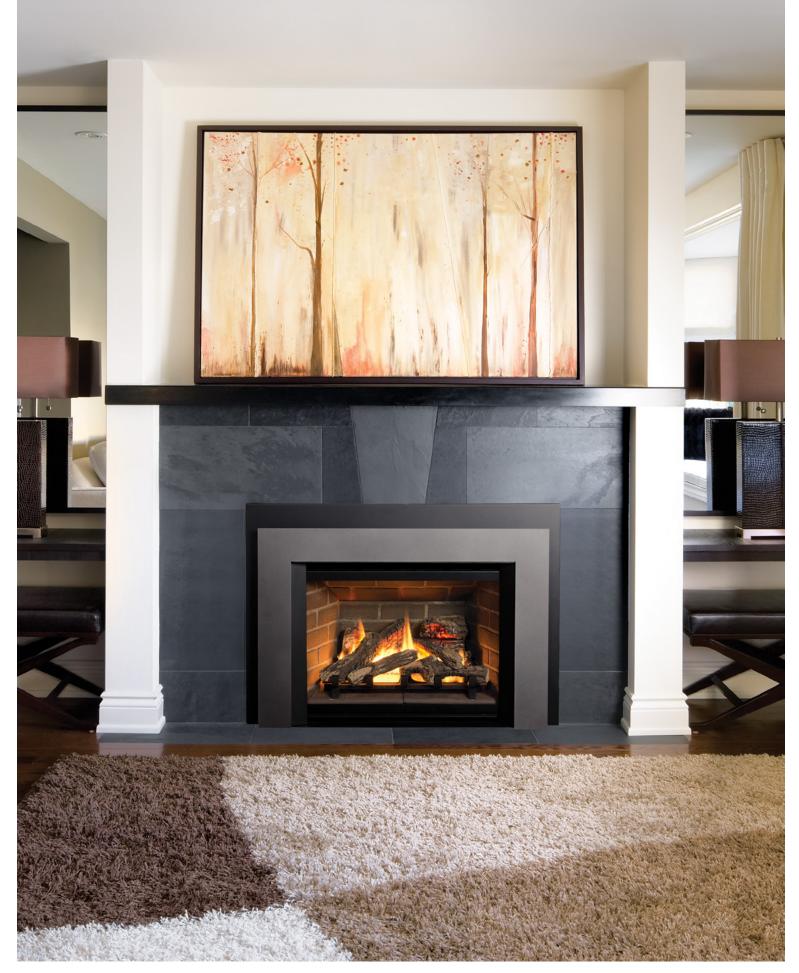



G3.5 700X fireplace with Murano Glass fuel bed 700XDGM, Fluted Black liner 707FBL, and Floating front in Vintage Iron 709FTV.

LEGEND G3.5 INSERT FIREPLACE COMPONENTS

DIRECT VENT	700IN 700IP	Stainless Burner: Natural Gas or Propane			fits fu	fits fuel beds 701RSK and 702LSK		
ENGINE	700XN 700XP	Ceramic Burner: Natural Gas or Propane			fits fuel beds 700XDWK, 700XDGS and 700XDGM NEW			
FUEL BED	701RSK	Rocks						
					fits S	tainless burner		
	702LSK	Logs	Deeeh Duifturee					
	700XDGM				fits Ceramic burner			
	700XDGS	Decora	ative Glass NEW					
LINER	705LSL	Ledges	stone					
	706RGL	Reflect	tive Glass NEW					
	707FBL	Fluted			fits b	oth Ceramic and Stainle	ss burners	
	708VRL	Valor	Red Brick					
FRONT	709FTB	Black			_			
Floating	709FTP	Brushed Nickel			- 3-sided (23-5/8"h x 33-3/4"w) -			
	709FTV	Vintage Iron						
	709FTZ	Bronze						
	713FFB	Black			- 4-sided (27-9/16"h x 33-3/4"w)			
	713FFV	Vintage Iron						
FRONT	716EHC	Hamm	ered Copper NE	W				
Edgemont	716EHV	Hammered Vintage Iron NEW			Requires trim: • 3-sided 717BPB or • 4-sided 719BPB.			
	716EH0Z	Hammered Oiled Bronze NEW						
	721EDN	Brushed Nickel						
	721EDV	Vintage Iron						
	721EDZ	Bronze						
TRIM	717BPB	Black,	3-sided		fits E	dgemont fronts (26-1/2	"h x 36-1/4"w)	
Edgemont	719BPB		4-sided		fits Edgemont fronts (20-1/2 in x 30-1/4 "w)			
5								
BACK PLATE	710BPB	Black,	3-sided		fits Floating fronts (26-7/8"h x 37-3/4"w)		n x 37-3/4"w)	
Optional	714BPB	Black,	3-sided		fits Floating fronts or 717BPB trim (29"h x 37-3/4"v			
	705 07 0				4.6.11			
RISER Optional	725RTB	Black			40"w x 2-1/2"h			
optional	793RTB	Black		46-1/4" w x 2-1/2"h				
	793RTV	Vintage Iron			46-1/4"w x 2-1/2"h			
FUEL	Model	Fuel	Max. Input	Min. Ir	tuar	EnerGuide Rating*	Max. Output w/o fan*	
(BTU/HR)	700IN	NG	26,000	10,00		67%	19,193	
	700IN 700IP	LPG	25,000	11,00		67%	18,455	
	700XN	NG	24,000	13,00		70.4%	17,825	

*EnerGuide Ratings and Outputs have been determined without a fan/blower, using the CSA P4.1-09 test method. Certified to ANSI Z21.88-2014/ CSA 2.33-2014 Vented Gas Fireplace Heater American National Standard. CGA-2.17-

91 Gas Fired Appliances for use at High Altitudes.













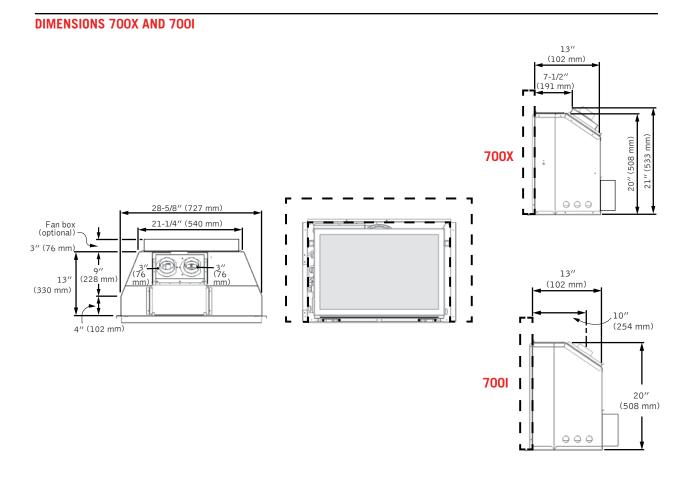

LEGEND G3.5 DIMENSIONS, MANTEL CLEARANCES AND VENTING

MANTEL CLEARANCES



Mantel Projection A	0-6"	8″	10″	12″
	0-152 mm	203 mm	254 mm	305 mm
Mantel Height B*	33″	35″	37″	39″
	838 mm	890 mm	940 mm	990 mm


*Measured from underside of mantel to finished hearth or surface that unit sits on.

MINIMUM CAVITY DIMENSIONS

- Minimum depth (X) = 13-1/2" (343 mm)
- Minimum depth (X) with a fan = 16-1/2" (420 mm)
- Minimum height (Y) = 20-1/2" (521 mm)
- Minimum width of fireplace opening at front = 28-7/8" (734 mm)


Please note the VDRT projects beyond the profile of the standard G3.5 insert. The 700X may require a larger existing fireplace cavity.

Installation reminder: Check that masonry step does not interfere with install dimensions or vent pipe. A non-combustible hearth is required.



VENTING

- Vertical vent run:
- Maximum 40 feet
- Minimum 10 feet

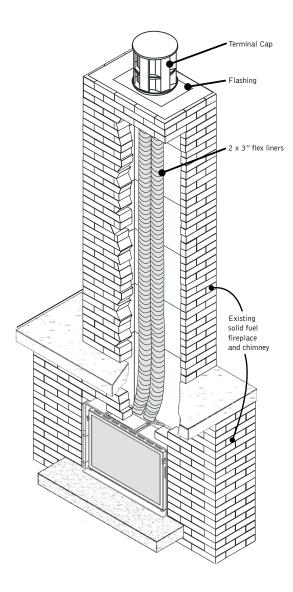



Copyright Miles Industries Ltd. 2014 Proudly made in North America BRG3516E—0CT 2016 Printed on recycled paper 755 Please Note: Printed images may vary from actual product. Refer to the 700I and 700X Legend G3.5 Insert Series engine manual for product installation. All product information is accurate at time of printing and is subject to change.

For more information visit valorfireplaces.com



G3.5 700X fireplace includes Pebble Beach Driftwood fuel bed 700XDWK, Fluted Black liner 707FBL, Hammered Copper front 716EHC with 3-sided Black trim 717BPB, and Black riser 725RTB.

SMARTFIRE by valor

RADIANT HEAT

Like heat from the sun, Valor fireplaces distribute radiant warmth directly to your living space. Radiant heat satisfies human comfort needs, using up to 25% less energy compared to traditional forced air systems. Valor warmth efficiently replaces the chill from cold windows and doors, providing steady, even heat to objects in the room

PACIFIC NORTHWEST DESIGN. **DEVELOPMENT & DISTRIBUTION**

Locally owned and operated in the Pacific Northwest, every Valor fireplace is designed, developed and manufactured exclusively for North America.

With a proven product family history, Valor continues to introduce unique fireplaces that stand the test of time.

BURN CLEAN, **ENGINEERED GREEN**




Natural gas is the cleanest fireplace fuel you can burn, with the lowest particulate levels and lowest levels of greenhouse gases. Valor specializes in the design of cost effective, heat solutions for your home.

NO POWER, NO PROBLEM™

If the power fails in the winter your home can get cold fast. Valor fireplaces are fully

functional heaters that don't use electricity. Our fireplaces provide the perfect mixture of radiant and convective heat reducing the need for a fan. No power, no problem.



EASY CONTROL

Our complimentary ValorStat remote control adjusts the flame up or down to match the heat output of your needs, providing a constant comfort level as the room warms or as the outside temperature falls—a fireplace for all seasons.



THE COMFORT ZONE

Reduce your furnace's output of hot air into empty rooms and

unused spaces. Zone heating requires no ducting or forced air, delivering radiant and convective warmth to the spaces you frequent the most. Where you want it-when you want it.

PRODUCT VERSATILITY

NO FAN NECESSARY

be warm. That's why we

designed exchangers to radiate

heat and naturally circulate warm

air by convection throughout the

room. While a fan is an option,

you'll likely find it unnecessary.

Known for our versatility in the field, Valor products are extremely diverse in their application and design. New construction or home renovation, gas inserts and freestanding stoves provide a wide range of preference when selecting the ideal fireplace that suits your personal heating needs.



RELIABILITY

SAVINGS

Your pilot flame will

automatically turn

off if your fireplace

is inactive for over 5 days, saving

With over 100 years in the fireplace industry, we take pride in providing high-quality, safe products.

Engineered to provide peace of mind, all Valor products undergo extensive safety testing before they reach our customer.

FIREPLACE SAFETY --- USE RADIANT HEAT SAFELY


Fireplace surfaces, in particular the glass viewing window, are extremely hot during operation and will remain hot for a period of time after the fireplace is turned off. Contact with the hot glass can cause severe burns. Close adult supervision is required if there are young children, or at-risk individuals in the house.

Included with your purchase, a Valor Barrier Screen is recommended at all times. Install an approved aftermarket safety gate to keep toddlers, young children and at-risk individuals a safe distance from the fireplace.

For more information please visit valorfireplaces.com/safety.













valorfireplaces.com